


## Model MD55T

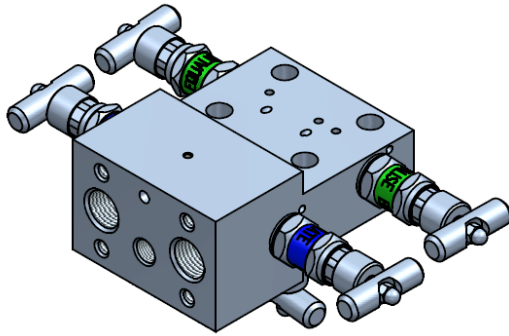

### Design Features

- Self aligning metal seats
- Compact Design
- Non-rotating spindle tip
- Metal seal between body and bonnet
- Bonnet Locking pins
- Safety back seating T-Bar and Anti-Tamper operated valves
- Full traceability of all materials
- 100% pressure tested (1,5 x MWP)

### Description

#### **The Multi Instruments T-Model Manifolds**

This compact T-model **5-valve manifold** is designed to accommodate the Rosemount 2051CD/3051CD Differential pressure transmitter integral mounted to the manifold interface.

This manifold is standard produced in AISI316/L material, but "exotic" materials are also available.

The main advantages for Integral mounting are less leaking points, weight saving and reduction in installation and maintenance time and costs.

Maximum working pressure is 420 Bar (AISI316)  
Maximum temperature is 200°C (PTFE packing)

### Options

- Anti tamper facility with a removable T-bar key to prevent unauthorized operation of the valve
- Sour Gas Service
- Mounting plates for 2" pipe stand
- Available in e.g. Monel, Hastelloy, Duplex, Super Duplex, Alloy 825, Alloy 625 materials.  
(NACE MR01-75 compliant)
- Body enclosure and EEx manifold heater
- High temperature up to 450°C (Graphite packing)
- High pressure up to 680 Bar (10.000 psi)


### Connections

Per default: Vent and/or test ports will be 1/4" thread size.

See ordering information on the back of this specification sheet for process port connection types available.

Process port pitch: 54 mm. Vent port is situated at the same side as the process ports.

### Valve Diagram

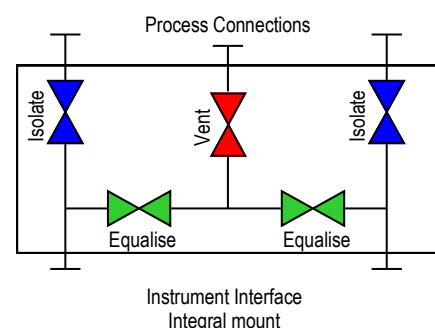

Head Office: ☎ +31 (0)183 62 88 88 or ✉ to: [instrumentation@multi-instruments.com](mailto:instrumentation@multi-instruments.com)

US + Canada: ☎ +1 587 269 49 88 or ✉ to: [solutions@multi-instruments.com](mailto:solutions@multi-instruments.com)

for additional information: 🌐 [www.multi-instruments.com](http://www.multi-instruments.com)

## Model MD55T

### Model selection guide

MD55T . SG . N03 . IM . YP . TST

#### Manifold Valve(s) Operation Mode

- .YP Mixed - PTFE seal
  - .YG Mixed - Graphite seal
  - .TP All T-Bar - PTFE seal
  - .TG All T-Bar - Graphite seal
  - .AP All Anti Tamper - PTFE seal
  - .AG All Anti Tamper - Graphite seal
- \* Isolate valve is T-Bar operated, in Mixed only Vent/Equalize valve is Anti-Tamper.  
\* PTFE <200°C, Graphite <450°C

#### Instrument Interface

- .IM Integral Mounting

#### Process Connector Options

- .N01 1/4" NPT female
- .N02 3/8" NPT female
- .N03 1/2" NPT female
- .BP01 1/4" BSP.P female (G1/4")
- .BP02 3/8" BSP.P female
- .BP03 1/2" BSP.P female (G1/2")
- .ISOC Contra DIN/IEC-Kidney Fl.
- .BW03 1/2" Butt weld pipe (e.g. sch160 - L= 100 / 200mm)

#### Material (wetted parts):

- .SG AISI316/L NACE
- .M Alloy 400 (Monel)
- .H Alloy C276 (Hastelloy)
- .INC825 Alloy 825
- .INC625 Alloy 625
- .D Duplex
- .SD Super Duplex
- .6M0 254SMO / 6Mo
- Ti Titanium Gr2

#### Manifold Function

- MD55T T-Model Double Isolate/ Double Equalize / Vent.

#### Manifold Options

- .TST Extra testport (default: 1/4")
- .BP Plugged test port
- .TC Test connector
- .FC Non Return Filling connector

#### NOTES

- \* Filling/Test connectors include the test port option.
- \* Test port executed in the same thread as the process connections.

